PRODUCT DATA SHEET

RUBBER CURB STOP

ROADLY





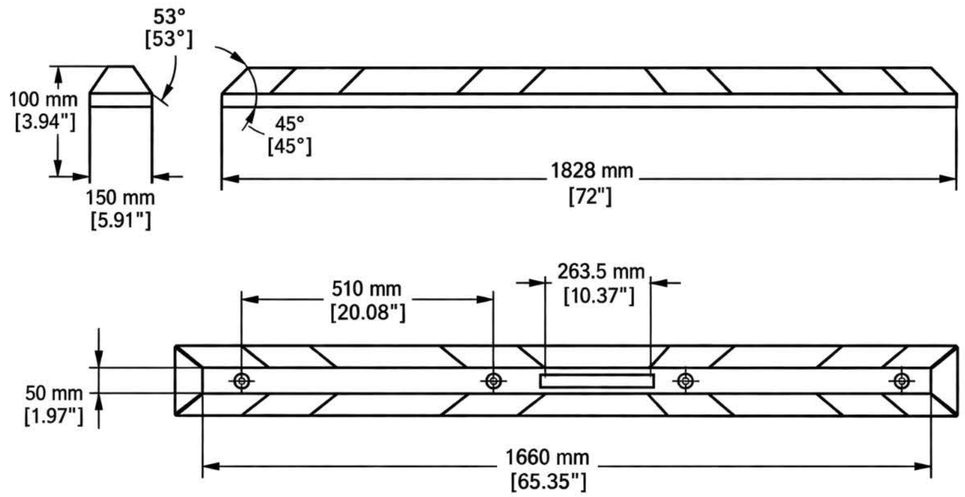


Fig. 1 — Product photos and dimensions in millimetres (mm) / inches.

DIMENSIONS

Overall length	**1828 mm [72"]**
Height	**100 mm [3.94"]**
Base width	**150 mm [5.91"]**
Chamfer angles	**53° / 45°**
Bolt hole span	**1660 mm [65.35"]**
Outer hole spacing	**510 mm [20.08"]**
Center hole spacing	**263.5 mm [10.37"]**
Base thickness	**50 mm [1.97"]**
Bolt holes	**4, recessed**

MATERIAL

95% pre & post-consumer recycled rubber from tires and conveyor belts.

5% virgin SBR rubber for added durability.

FEATURES

- ✓ High tensile strength and tear resistance from fibre-reinforced source material.
- ✓ Embedded solid reflective stripes made from yellow road-marking tape.
- ✓ Reinforced, recessed bolt holes for secure, low-profile mounting.
- ✓ Weather-resistant rubber compound built for Canadian job sites.